



# LOCKLY GUARD<sup>TM</sup> LATCH 679L



## 999 RFID card access

Mobile App Control  
PIN Genie<sup>TM</sup> digital keypad

Secure and manage what's most important to you. Designed with the handle connected to latch throw providing versatility to lock and unlock and conveniently open your door from a single point of motion. With provision for 999 RFID cards making it suitable for a high traffic door requiring constant monitoring and checks.



Multifamily



Residential



Offices

- Front doors
- Office doors
- Back doors
- Hotel Rooms
- Rental Cabins
- And more



### Hack-proof digital Keypad

Generate and stores up to 49 access codes with specific profiles and permissions



### RFID / Fob Key Access

Fast and secure access, stores up to 999 fob keys or RFID cards



### Mobile App Control

Unlock, lock, or check door on your smartphone

## Features and benefits



### 100M+ accesses granted

Most trusted fingerprint sensor smart lock



### Hack-proof Keypad

Patented PIN Genie® shuffling the keypad numbers



### Smartphone control

Open/close, share, or revoke access with others



### Wi-Fi alerts and control

Get status, alerts, and control from anywhere



### MIFARE RFID card

Fast, easy and secure access



### Programmable auto-locking

Never worry about forgetting to lock your door



### Weatherproof


IPX4 works in -4°F to 151°F (-20°C to 66°C)



### Re-key Capable

Replace the key not the lock with standard re-key kit

## Property management

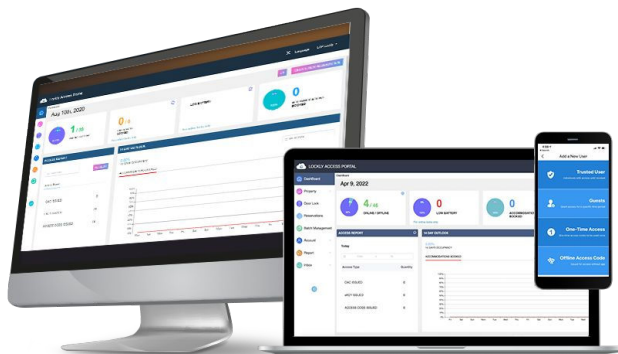

### See the big picture from here

Works with LocklyOS™ Total Access\* a full property management system of software, products, and services designed to allow you to view and control where, when, and by whom your property's being accessed from anywhere in the world.



Wi-Fi  
Controlled\*

## Installation




### Professional Installation Recommended

This product can be easily installed by advanced DIYers. It will only take a few minutes if pre-existing bore holes exist. It is recommended to contact a professional installer if you drilling new holes is required.

Door thickness  
1 3/8" (35mm) to  
2" (50mm)

Cross bore  
1" (25mm)

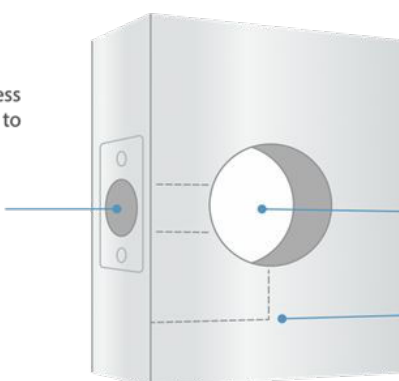

Bore hole  
2-1/8" (54mm)

Backset (standard)  
2-3/8" (60mm) or  
2-3/4" (70mm)



Download installation  
guide



Download door  
drilling template



Watch installation video



Download user manual

## Access and control options



Your finger is  
your key



Mobile app  
Control



Secure  
Scan-to-Open



Real-time  
smartphone alerts



Voice assistant  
Control



RFID Card  
access

### Keyless Access

Secure, fast, and convenient on-site set-up, allows management of properties from anywhere

### Mobile App Control

Unlock, lock, check door, track access history and unique user profile data.

### Offline Access Codes™

Grant access codes to trusted users. Codes work offline without Wi-Fi or Internet.

### Grant Access, when you're not there

Remotely lock and unlock your door from anywhere.

### Real-time Monitoring and Status

Monitor open/closed door status with real-time alerts sent to your smartphone.

### Auto Locking

Never worry about forgetting to lock the door with programmable auto-locking.

### Wi-Fi Control

Monitoring and control from anywhere and voice assistant control.

### Replace the key not the lock


Re-key with readily available standard 5-pin cylinder SC1 re-key kits.

### Lockly Air Transfer Programming

Duplicate user profiles from an existing Lockly smart lock to PIN Genie in just a few clicks.

### Fast Pass MIFARE RFID Access

Supports up to 999 cards (3 RFID Cards included)

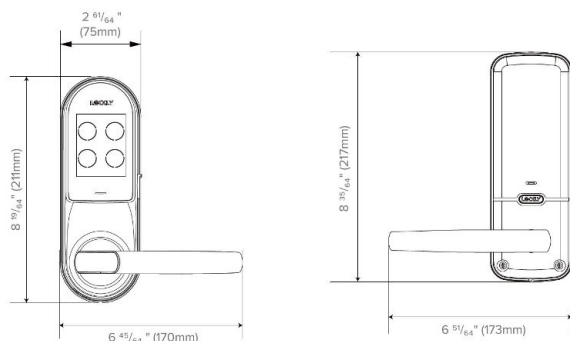

## Electronic Specifications

<b>Access Codes</b>	Stores up to 49 PIN access codes
<b>RFID/Fob key Access</b>	Stores up to 999 MIFARE RFID/fob
<b>Fingerprint Access</b>	Stores up to 99 biometric fingerprints
<b>Remotely Shareable Temporary Access</b>	Unlimited Offline Access Codes <sup>os</sup> / eBadges
<b>Access Logs</b>	Unlimited <sup>os</sup> Accessible via LocklyPro Commercial app or LocklyOS™
<b>Visual and Audible</b>	Exterior: LED (Red, Green) Interior: LED (Red) Configurable Lock/Unlock Audio Indicator
<b>Communication Standards</b>	BLE 4.2, Wi-Fi 2.4GHz, RF433.92MHz Advanced Encryption Standard (AES), 256-bit
<b>Gateway Communication Range (networked solution)</b>	Up to 98' (30m) BLE Up to 197' (60m) Wi-Fi Up to 164' (50m) RF433.92MHz Unobstructed open environment
<b>Command Response</b>	Responds to command from host in less than 3 seconds when linked to Lockly Wi-Fi Hub 0.2S on Fingerprint Recognition
<b>Connectivity Options</b>	LocklyPro Commercial app, LocklyOS, Matter Controller ALL in real-time communication
<b>Available Signal Status</b>	Battery Status via App Open/Close Door Status Bluetooth Connectivity Indicator Sensor LED (Red/Green)
<b>Battery Life</b>	AA Alkaline Batteries x 4 Up to 1 year (offline mode) up to 10 months (regular use with App & Sensor)
<b>Operating Temperature</b>	-4°F to 151°F (-20°C to 66°C)
<b>Operating Humidity</b>	0 - 100% non-condensing

## Credential Specifications

<b>Credential Technologies</b>	RFID Card (13.56 MHz), BLE (2.4 GHz) Wi-Fi (2.4GHz) Capacitive Sensor Patented PIN Genie Keypad
<b>Standards</b>	ISO 14443
<b>Maximum Read Range</b>	RFID: up to 0.79" BLE: up to 98' (30m) Wi-Fi: up to 197' (60m)
<b>RFID/Fob Compatibility</b>	MIFARE® S50
<b>Mobile Compatibility</b>	LocklyPro Commercial app BLE 4.2 LocklyOS, Matter

## Mechanical Specifications

<b>Handing</b>	Field reversible
<b>Materials</b>	Premium Zinc Alloy chassis and escutcheon 45 mins Fire tested / Salt Resistant (200hrs test)
<b>Door Thickness</b>	1-3/8" - 2" (35mm- 50mm)
<b>Backset</b>	Adjustable 2-3/8" or 2-3/4" (60mm or 70mm) 1" x 2 1/4" round corner faceplate
<b>Strike</b>	Latchbolt: 1 3/4" x 2 1/4", round corner, Dust box included
<b>Bore</b>	2-1/8" (54mm) diameter Bore hole 1" (25mm) diameter latch hole
<b>Physical Keys</b>	SC1 Re-keying compatible, 2pcs included

## Certifications /Warranty

<b>Certification</b>	UL 10B   UL 10C FBC RoHS FC ADA NFPA 252   CAN/ULC-S104
<b>Warranty</b>	Lifetime 24/7 Technical Support 2-year Limited Mechanical & Finish 2-year Limited Electronics

<sup>os</sup> Requires LocklyOS subscription<sup>1</sup> Product Serial number must contain N, such as PGD679NXXXXXXXXX.

## Ordering information

<b>1 Edition</b> PGD679L Latch	<b>4 Finish</b> SS Stainless Steel MB Matte Black AB Aged Bronze Custom colors available (advanced order required)	<b>7 RFID / Fob key</b> <a href="#">PGA803WH</a> Tag key (~3 included) <a href="#">PGA803P</a> Fob key (10pcs.not included) <a href="#">PGA803L</a> 1" RFID sticker (10pcs) <a href="#">PGA803LL</a> 2 1/2" x 1 1/8" RFID sticker (10pcs) <a href="#">PGA803S</a> RFID card (10pcs)
<b>2 Wi-Fi Hub</b> PGH200 (included/optional) *Wi-Fi hub required	<b>5 Credential Manager Encoder</b> not included/optional <a href="#">PGA349</a>	<b>8 Matter Link</b> PGH260 (optional/ sold separately) Only selected versions are supported <sup>1</sup>
<b>3 Touchscreen Cover</b> Included PGA717SN or PGA717MB	<b>6 Extension Screw Kits</b> (optional/ sold separately) 2"- 2-3/8" (50-60mm) door thickness PGA609	